

# TELEHANDLERS

## T3007

MINIATURE BODYWORK  
FLEXIBLE OPERATION



**HI**  **SEN**

**TOUGH, RELIABLE**

LEARN MORE AT [LEARN MORE AT CHINESEEXCAVATOR.COM](http://CHINESEEXCAVATOR.COM)



### PALLET FORKS

Rugged design makes it easier to handle heavy palletized material



### GRAPPLE BUCKET

Uses hydraulic arms to secure bulky loads and is useful for cleaning debris from job sites



### MATERIAL HANDLING ARM

Designed for lifting and placing objects around the job site



### PIPE GRAPPLE

For handling multiple pipes or a larger single pipe

# PRODUCT PARAMETERS

## TELEHANDLER T3007

|                                             |       |                          |
|---------------------------------------------|-------|--------------------------|
| Max. capacity                               |       | 3000 kg                  |
| Max. lifting height                         |       | 7.0 m                    |
| Max. outreach                               |       | 3.2 m                    |
| Overall length to carriage                  | l11   | 4.65 m                   |
| Length to face of forks                     | l1    | 5.87 m                   |
| Min transport size                          | l12   | 4.35 m                   |
| Overall width                               | b1    | 2.20 m                   |
| Track width                                 | b2    | 1.78 m                   |
| Overall height                              | h17   | 2.55 m                   |
| Wheelbase                                   | y     | 3.15 m                   |
| Ground clearance                            | m4    | 0.35 m                   |
| Overall cab width                           | b4    | 0.84 m                   |
| Tilt-up angle                               | a4    | 12°                      |
| Tilt-down angle                             | a5    | 90°                      |
| External turning radius(over tyres)         |       | 4.25 m                   |
| Unladen weight(with fork)                   |       | 7600 kg                  |
| Tires type                                  |       | Pneumatic                |
| Standard tires                              | l/e/s | 16/70 -20                |
| Lifting                                     |       | 10 s                     |
| Lowering                                    |       | 7 s                      |
| Extension                                   |       | 12 s                     |
| Retraction                                  |       | 8.6 s                    |
| Crowd                                       |       | 4.8 s                    |
| Dump                                        |       | 3.4 s                    |
| Engine brand                                |       | Yunnei Engine            |
| Engine norm                                 |       | National II              |
| Max. fuel sulphur content                   |       | 5000 ppm                 |
| Engine model                                |       | YN38GBZ                  |
| Number of cylinders / Capacity of cylinders |       | 4 - 4400 cm <sup>3</sup> |
| I.C. Engine power rating - Power            |       | 103 Hp / 76 kW           |



### LOG HANDLER

For handling multiple logs or a large single log



### BALE CLAMP

For picking, carrying and placing large square bales



### BALE CRADLE



For picking, carrying and placing large round bales



### STANDARD CARRIAGE

Forks that are fully floating and adjustable side-to-side for efficient load entry and exit

|                                     |                                                    |
|-------------------------------------|----------------------------------------------------|
| Max. torque / Engine rotation       | 400 Nm @ 1400 rpm                                  |
| Drawbar pull (Laden)                | Torque converter                                   |
| Number of gears (forward / reverse) | 4 / 4                                              |
| Max. travel speed                   | 35 km/h                                            |
| Parking brake                       | Automatic air-cut brake                            |
| Service brake                       | immersed multi-discs braking on front & rear axles |
| Hydraulic pump type                 | Gear pump                                          |
| Hydraulic flow                      | 120L                                               |
| Engine oil                          | 5.5L                                               |
| Hydraulic oil                       | 170L                                               |
| Fuel tank                           | 195L                                               |
| Noise at driving position (LpA)     | 82 dB                                              |
| Noise to environment (LwA)          | 105 dB                                             |
| Vibration on hands / arms           | < 2.50 m/s <sup>2</sup>                            |
| Steering wheels (front / rear)      | 2 / 2                                              |
| Drive wheels (front / rear)         | 2 / 2                                              |
| Safety cab homologation             | FOPS level 2 cab                                   |

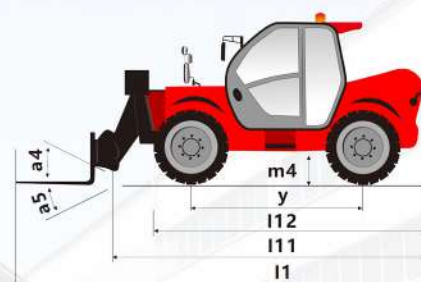

Machine on tyres with forks - with levelling device Metric

